

10/16/00
1c944 U.S. PTO
Frederick P. Fish
1855-1930
W.K. Richardson
1859-1951

10-17-90
FISH & RICHARDSON P.C.

A
225 Franklin Street
Boston, Massachusetts
02110-2804

October 16, 2000

Telephone
617 542-5070

Facsimile
617 542-8906

Web Site
www.fr.com

JC927 U.S. PTO
09/688939
10/16/00

Attorney Docket No.: 07442-022001

Box Patent Application
Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: WILLIAM DAVENPORT

Title: TRICK-MODE PROCESSING FOR DIGITAL VIDEO

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

	<u>Pages</u>
Specification	10
Claims	5
Abstract	1
Declaration	1
Drawing(s)	5

Enclosures:

— Postcard.

Basic filing fee	\$710
Total claims in excess of 20 times \$18	\$198
Independent claims in excess of 3 times \$80	\$80
Fee for multiple dependent claims	\$0
Total filing fee:	\$988

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL245417432US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit October 16, 2000
Signature Samantha Bell
Typed or Printed Name of Person Signing Certificate Samantha Bell

FISH & RICHARDSON P.C.

Commissioner for Patents

October 16, 2000

Page 2

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.

Please note that, although Applicant is paying the fees corresponding to a large entity, Applicant is entitled to small entity status. A Verified Small Entity Status will be forthcoming and a credit for the excess payment will be requested.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (617) 542-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

FAUSTINO A. LICHAUCO
Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804

Respectfully submitted,



Faustino A. Lichauco
Reg. No. 41,942
Enclosures
FAL/deg
20137383.doc

20137383.doc

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: TRICK-MODE PROCESSING FOR DIGITAL VIDEO
APPLICANT: WILLIAM DAVENPORT

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL245417432US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit

October 16, 2000

Signature

Samantha Bell
Typed or Printed Name of Person Signing Certificate

TRICK-MODE PROCESSING FOR DIGITAL VIDEO

This application relates to processing digital video, and in particular, to the display of digital video files in fast-forward or rewind mode.

BACKGROUND

When viewing a film, it is often desirable to skip over uninteresting scenes or, conversely, to rewind the film to repeat certain scenes. As a result, virtually all video playback units include fast-forward and rewind controls that enable the viewer to rapidly move forward or backward along the film.

However, without the ability to identify selected portions of the film, it is difficult for a viewer to determine how long to operate in fast-forward or rewind mode. To address this difficulty, virtually all video playback units provide some position-indicating feedback to the viewer. A particularly useful method of providing such feedback is to continue displaying the film when operating in fast-forward or rewind. These two types of displays are collectively referred to in the industry as "trick-mode" displays.

In both analog and digital video delivery systems, an ordered sequence of images is shown to the viewer at a rate (approximately 24 images per second) that is fast enough to give the user the illusion of motion. Aside from the improved image and sound quality associated with digital video, there is little noticeable difference between these delivery systems so long as they operate in normal mode. The difference between analog and digital video delivery systems becomes quite apparent, however, when one switches to trick-mode display.

When operating in trick-mode, an analog video delivery system, such as a video tape recorder, simply speeds up the rate at which the medium containing the video signal slides past a read head. To a first approximation, this results in a uniform compression of the temporal axis. A viewer thus sees all the action in the film being performed at a uniformly accelerated pace.

In contrast, a digital video delivery system operating in trick-mode generally does not show each image from the sequence of images making up the film. Instead, a trick-mode processor selects a subset of images from the film and transmits those images to a decoder for display to the viewer. Since these selected images are generally represented by differing amounts of data, they take varying amounts of time to reach the decoder and

varying amounts of time to be processed by the decoder. The sum of the transmission time and the processing time is referred to as the "delivery interval."

When the decoder receives a first selected image, it decodes it and provides the resulting signal to the video input of a television for display to the viewer. The decoder repeatedly provides this signal to the video input until a second selected image becomes available for display. The viewer thus sees the first selected image while the decoder processes the second selected image. When the decoder completes processing the second selected image, it provides this new signal to the video input. The viewer then sees the second selected image.

The length of the time interval during which the viewer sees the first selected image thus depends on the time required to have the second selected image ready for display. Since the selected images can have very different sizes, this time interval can vary significantly. For example, if the second image is represented using only a very small amount of data, only a short time elapses before it is ready for display. Consequently, the viewer will see the first image for only a very short time before it is replaced by the second image. Conversely, if the second image requires considerable data for representation, a long time elapses before it is ready for display. Consequently, the viewer will see the first image for an extended period before it is finally replaced by the second image.

A digital video delivery system operating in trick-mode thus displays selected images for varying amounts of time. As a result, a viewer who activates trick-mode for a fixed number of seconds will advance or rewind the film by unpredictable amounts of time. This makes it difficult to judge, by watching the sequence of images go by, how much time has elapsed in the film. In addition, the subjective experience of watching a sequence of images in which each image is displayed for a seemingly random time can be unpleasant.

SUMMARY

The invention provides for the display of a video file in trick-mode by equalizing delivery intervals for the frames that are to be displayed. With the delivery intervals being substantially equal, images to be displayed in trick-mode are provided to a display device at a substantially uniform rate. This enables the display device to display each frame for substantially the same amount of time, thereby providing a smoother trick-mode display.

Generally, a digital video file includes an ordered sequence of frames to be displayed to a viewer. In one practice of the invention, digital video data for trick-mode display is derived from this sequence of frames by specifying an acceptable range of delivery intervals and generating a modified frame for trick-mode display of the selected frame. The modified frame includes data representative of the selected image, but modified for delivery at a delivery interval within the acceptable range of delivery intervals.

One method for facilitating the delivery of frames at a uniform rate is to specify a range of frame sizes on the basis of the acceptable range of delivery intervals and processing the data representative of the selected image to create a modified frame having a modified-frame size within the range of frame sizes. Depending on the amount of data representative of the selected image, this can include padding the data representative of the image to enable the modified-frame size to reach the lower limit of the specified range of frame sizes. Or, if there is too much data, this can include degrading the image by selectively reducing the amount of data representative of the image so that the modified-frame size falls below the upper limit of the specified range.

One way to selectively reduce the amount of data representative of the image is to discard selected high frequency coefficients from that data. This can be achieved directly by simply deleting those coefficients. However, this can also be achieved by changing a quantizer scale associated with the data representative of the selected image.

The image can be degraded uniformly, so that all portions of the image are degraded in the same way. Or, the degradation of the image can be selective, so that different portions of the image are degraded by different amounts. In the latter case, the image can be divided into zones, with each zone being weighted by a relative importance. The degradation for portions of the image that fall within a zone can then depend on the relative importance of that zone to the user's perception. In many cases, the zone of most importance is the central portion of an image. In such cases, it is preferable to degrade the peripheral portion of the image more than the central portion of the image.

The digital video data can be encoded in any manner. The method of the invention can be adapted to the trick-mode display of MPEG files, wavelet encoded files, and other files containing compressed video data.

When the digital video file is an MPEG file, the ordered sequence of frames can be a sequence of intra-coded frames. The sequence of modified frames can then be saved in a trick-file containing modified intra-coded frames. In one practice of the invention, these modified intra-coded frames are separated by frames specifying zero motion.

Where the selected frame contains interlaced video data, the method optionally includes removal of the interlacing so as to provide a more flicker-free display in trick-mode. In the case of an MPEG file, in which a frame includes two fields, this can include overwriting one field with the contents of the other.

To facilitate transitions between normal and trick-mode display of data, the method of the invention includes indexing the modified frame to the selected frame. This facilitates transition between a normal mode display, in which data representative of the image is obtained from the selected frame, and a trick-mode in which data representative of the image is obtained from the modified frame.

The invention also provides for two different video data sources: a first source for trick-mode display and a second source for normal mode display. In response to an instruction to transition from normal mode display of digital video data to trick-mode display, the method of the invention includes serving trick-mode data from the first source. In response to an instruction to transition from trick-mode display to normal mode display, the method includes serving normal mode data from the second source.

These and other features of the invention will be apparent from the following detailed description and the drawings, in which:

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 shows a video delivery system for practice of the invention;

FIG. 2 is a more detailed diagram of the video client shown in FIG. 1;

FIG. 3 is a schematic diagram of a disk-head reading a file on the mass-storage subsystem of FIG. 1;

FIG. 4 illustrates the process of creating a trick-file corresponding to the content file shown in FIG. 1; and

FIG. 5 is a flowchart of the manner in which video data from the content file of FIG. 1 is modified to achieve a substantially uniform delivery rate in trick-mode.

DETAILED DESCRIPTION

FIG. 1 shows a video delivery system **10** that includes a video server **12** in communication with both a mass-storage subsystem **14** and a high bandwidth data-communication network **16**. The video server **12** is in communication with a large number of subscribing video clients through the data communication network **16**. For simplicity, FIG. 1 illustrates a representative connection to one such video client **18**.

Although shown schematically as a single disk, the mass-storage subsystem **14** is more typically an array of disks under the control of a RAID controller. However, the mass-storage subsystem **14** can be an optical disk, for example a DVD, or magnetic tape, or any other medium for data storage. The mass-storage subsystem **14** holds data representative of video content to be delivered to the video client **18** for real-time viewing. This video content is typically stored as a content file **20**. Each content file **20** consists of a sequence of frames, each carrying data representative of an image. The content file **20** is typically an MPEG file, the structure of which is well-known and described in such publications as ITU-T Recommendation H.262, the contents of which are incorporated by this reference.

The video client **18**, shown in more detail in FIG. 2, includes a buffer **22** for temporary storage of one or more frames received from the video server **12** over a network interface **24**. The buffer **22** is in communication with a decoder **26** that retrieves frames from the buffer **22** and recovers the data encoded into those frames. This recovered data is then provided to a display driver **28** for translation into a form suitable for delivery to a display device **30**. A processor **32** controls the operation of the video client **18** in response to instructions received from a viewer **36** through a viewer-interface **38**.

Using the viewer-interface **38**, the viewer **36** issues instructions to perform such tasks as selecting the content to be played and initiating the play of that content in normal mode. Among the instructions that the viewer **36** can issue is an instruction to play the content in fast-forward or fast-backward mode. These two modes are collectively referred to as "trick-mode."

In normal mode, the video server **12** retrieves frames from the MPEG content file **20** and transmits them to the video client **18**. As shown in FIG. 3, these frames include "I" (intra-coded) frames separated from each other by approximately half a second of normal playback time. Each I-frame is thus a self-contained representation of an image.

The half-second of normal playback time between I-frames is filled with "P" (predictive) frames and "B" (bidirectional) frames. A P-frame encodes differences between its corresponding image and the image corresponding to a previous I- or P-frame. A B-frame encodes differences between its corresponding image and the image(s) corresponding to a previous and/or subsequent I- or P-frame. Consequently, unlike an I-frame, neither the P-frame nor the B-frame can be used in isolation to construct an image.

In a trick-mode display, only selected frames are displayed to the viewer. Because they can be decoded independently of any other frames, the frames selected for trick-mode display are typically I-frames. In a conventional trick-mode display, these frames are read directly from the content file **20** and provided to the decoder **26**.

As noted above, a disadvantage of the conventional trick-mode display is that the I-frames contain differing amounts of data and therefore require different delivery intervals before being available for display. An additional disadvantage is that whenever a disk-head **40** reads data, it reads a fixed amount of data. As suggested by FIG. 3, this fixed amount of data may encompass not only an I-frame but portions of neighboring P-frames or B-frames. In normal mode, these portions of neighboring frames are eventually used because all frames are ultimately displayed. However, in trick-mode, these portions are discarded. Hence, the bandwidth required to retrieve and transmit them is wasted.

A system incorporating the invention includes separate trick-files **42a**, **42b** stored on the mass-storage subsystem. A forward trick-file **42a** is used for fast-forward trick-mode display and a backward trick-file **42b** is used for fast-backward trick-mode display. These trick-files **42a**, **42b** includes "T" (trick) frames that correspond to the I-frames in the content file **20**. When operating in trick-mode, the video server **12** retrieves T-frames from the appropriate trick-file **42a**, **42b** rather than I-frames from the content file **20**. Because each T-frame is potentially displayed to the viewer, the fact that the disk-head **40** may read portions of neighboring T-frames no longer represents a waste of bandwidth when operating in trick-mode.

While the illustrated embodiment specifies that frames selected for display in trick-mode be I-frames, it is possible to include P-frames or B-frames within the set of selected frames. Doing so provides smoother trick-mode display than can be achieved with I-frames alone, but at the cost of additional processing complexity.

Referring now to FIG. 4, the trick-files **42a**, **42b** are created in advance by extracting the I-frames from an MPEG content file **20** to create an I-frame sequence **44**. Each I-frame from the I-frame sequence **44** is then provided to a trick-file process **46**. The trick-file process **46** modifies the data contained within the I-frame to ensure that the delivery interval for that data conforms to a range of specified delivery intervals. It does so by taking into account the number of frames per second ("FPS") that the display device expects, the transport bit rate ("TBR") for the network, and the video bit rate ("VBR").

The modified data generated by the trick-file process **46** is then used as a basis for constructing a T-frame. To enable it to be decoded transparently by any decoder, a T-frame is encoded in the same manner as an I-frame. It is referred to as a T-frame only to avoid confusion with the I-frame that is input to the trick-file process **46** to create it.

The T-frames generated by the trick-file process **46** are then interleaved with B-frames or P-frames specifying zero motion vectors. This causes the decoder **26** to simply repeat the preceding T-frame. The T-frames, together with the B-frames or P-frames interleaved between them, form a T-frame sequence **48**. This T-frame sequence is written to the mass-storage subsystem as the forward trick-file **42a**. A copy of the T-frame sequence **48** is then provided to an inverter **50** that rearranges the time-stamps associated with the T-frames to create the backward trick-file **42b**. Both trick-files **42a**, **42b** have the same transport and video bit rates, the same picture resolution, and the same number of frames per second as the content file **20** from which they were derived. However, the time-stamps for the backward trick-file **42b** will run in the opposite direction from those in the forward trick-file **42a**.

The trick-file process **46** also creates an index file **52** that correlates T-frames in the trick-files **42a**, **42b** with their corresponding I-frames in the content file **20**. The index file **52** enables the video server **12** to know which frame to retrieve from the appropriate trick-mode file **42a**, **42b** when the viewer **36** issues an instruction to display in trick-mode and which frame to retrieve from the content file **20** when the viewer **36** issues an instruction to revert to normal mode.

FIG. 5 illustrates the method used by the trick-file process **46** to modify I-frames to generate corresponding T-frames. The method begins with the evaluation **52** of the allowable range of sizes for the resulting T-frames. This allowable range of sizes is calculated from the allowable range of delivery intervals on the basis of the number of frames per second that the display device expects, the transport bit rate for the network, and the video bit rate. The trick-file process then retrieves **54** an I-frame from the content file and removes **56** any extraneous null padding or user data that is encoded in that I-frame.

Where the content file encoded as interlaced rather than as progressive scan, the I-frame consists of two fields to be displayed 1/60 second apart (in the case of display devices operating at 30 fps). To avoid an unpleasant flickering effect when the display device repeatedly switches back and forth between the two fields, the method includes the optional step of overwriting **58** the contents of one field with the contents of the other field. This step is unnecessary when the content file is encoded as progressive scan.

The trick-file process then determines **60** whether the amount of data in the I-frame is such that the delivery interval for that I-frame is within the allowable range. If the amount of data is such that this is the case, then the I-frame is added **62** to the trick-file sequence, a B-frame (or a P-frame) is added **64** after the I-frame (now referred to as a T-frame), and an entry is made **66** in the index file. The trick-file process then determines if there are any additional I-frames to process **68**. If there are no additional I-frames to process, the trick-file process writes **69** the trick-file to the mass-storage subsystem.

In an optional practice of the invention, the trick-file is written incrementally, with additional T-frames being added to the trick-file as they are generated. The practice of incrementally writing the trick-file enables the implementation of trick-mode display of live-broadcasts.

If the I-frame contains too little data **70**, the delivery interval for that I-frame will be too short. Under these circumstances, the trick-file process creates a corresponding T-frame by adding null padding to the I-frame **72**. The trick-file process then checks the size of the padded frame **60** and, if the size is within the allowed range, proceeds to add **62** that frame to the trick-file sequence and to carry out the subsequent steps as described above. Alternatively, null transport packets are added to the trick-file to consume additional space and to thereby postpone the time at which the excessively short I-frame will be available for display.

If the I-frame contains too much data, the delivery interval for that I-frame will be too long. Under these circumstances, the trick-file process creates a corresponding T-frame by selectively removing data from the I-frame 74.

An image encoded into an MPEG file is divided into a large number of macroblocks, each of which corresponds to a portion of the image. Each macroblock is then subjected to a discrete cosine transform (DCT), the result of which is a table of DCT coefficients representative of the amplitudes of the various spatial frequency components that make up that portion of the image represented by the macroblock. To achieve further compression, these amplitudes can be scaled down, thereby enabling them to be represented by a smaller number of bits. This is achieved in a quantization step in which each DCT coefficient in a macroblock is divided by a corresponding entry from a quantization table. This step is referred to as "quantization" because, as a result of round-off and truncation inherent in integer division, a DCT coefficient may not be recoverable in its original pre-quantization form. As a result, this step introduces a quantization error. By adjusting this quantization error, the trick-file process can adjust the size of the frame.

In one practice of the invention, the trick-file process scales the entries in the quantization table used in originally encoding the "I" frame. The DCT coefficients are then re-quantized using the scaled quantization table and the resulting re-quantized DCT coefficients are used to encode the "T" frame. The quantization table is scaled such that the re-quantized DCT coefficients are representable with fewer bits than the originally quantized DCT coefficients. This enables the resulting T-frame to include less data and to therefore have a shorter delivery interval.

The foregoing re-quantization results in additional image degradation. To minimize the perception of image degradation, different quantization tables can be used for different portions of the image. For example, since the central zone of the image is often where a viewer's attention is focused, the quantization tables for macroblocks from the central zone can be altered only slightly or not at all. Macroblocks from the periphery of the image could then be altered to degrade those portions of the image far more than would be tolerable in the central zone of the image.

Stated more generally, an image can be divided into two or more zones, each of which has a weight indicative of the attention that image is likely to receive from a viewer. The quantization table to be used for requantizing a macroblock can then be made a function of what zone that macroblock lies within. In the above example, there

are two zones, with the more perceptually important zone being the center of the image. However, the perceptually important zone can be anywhere in the image.

In practice, there may exist I-frames for which the re-quantization process described above reduces the amount of data so much that the resulting T-frame is too small. Alternatively, the re-quantization process may not succeed in reducing the amount of data sufficiently. The frame degradation step 74 is thus followed by re-execution of the loop that begins with the step of determining 60 whether the frame size is within a target range.

The foregoing description discloses an implementation in the context of an MPEG-2 file. However, the method is clearly applicable to digital video that is encoded in other MPEG formats (such as MPEG-4) and using other compression methods. For example, digital video compressed using wavelet transforms rather than discrete cosine transforms also can be displayed in trick-mode using the method described herein.

Having described the invention, and a preferred embodiment thereof, what is claimed as new and secured by letters patent is:

CLAIMS

1. A method for processing digital video data for trick-mode display, said digital video data having an ordered sequence of frames, said method comprising:
 - specifying a range of delivery intervals;
 - selecting a frame from said ordered sequence of frames, said selected frame including data representative of a selected image;
 - generating a modified frame for trick-mode display of said selected frame, said modified frame including data representative of said selected image and being modified for delivery at a delivery interval within said range of delivery intervals.
2. The method of claim 1 further comprising including said modified frame in a sequence of modified frames to be displayed in trick-mode.
3. The method of claim 1 wherein generating a modified frame comprises
 - specifying a range of frame sizes on the basis of said specified range of delivery intervals; and
 - processing said data representative of said selected image to create a modified frame having a modified-frame size within said range of frame sizes.
4. The method of claim 3 wherein processing said data representative of said selected image comprises padding said data to enable said modified-frame size to be within said specified range of frame sizes.
5. The method of claim 4 wherein padding said data comprises adding null packets to said data.
6. The method of claim 3 wherein processing said data representative of said selected image comprises degrading said data representative of said selected image such that said modified frame size is less than an upper bound of said range of frame sizes.

7. The method of claim 6 wherein degrading comprises discarding selected high frequency coefficients from said data representative of said selected image.
8. The method of claim 6 wherein degrading comprises changing a quantizer scale associated with said data representative of said selected image.
9. The method of claim 6 wherein degrading comprises
 - selecting a first portion of said selected image;
 - selecting a second portion of said selected image;
 - degrading data representative of said first portion differently from data representative of said second portion.
10. The method of claim 9 further comprising selecting said second portion to be a central portion of said selected frame and selecting said first portion to be a peripheral portion of said selected frame.
11. The method of claim 2 further comprising saving said sequence of modified frames in a trick-file.
12. The method of claim 2 further comprising transmitting said sequence of modified frames to a video client.
13. The method of claim 11 wherein saving said sequence comprises saving said trick-file in a mass-storage subsystem.
14. The method of claim 13 wherein further comprising selecting said mass-storage subsystem from a group consisting of: a magnetic disk, an optical disk, and a magnetic tape.
15. The method of claim 11 wherein said digital video file is an MPEG file and saving said sequence of modified frames in a trick-file comprises interleaving said modified frames with frames specifying zero motion.
16. The method of claim 1 further comprising selecting said digital video file to be an MPEG file.

17. The method of claim 16 further comprising selecting said ordered sequence of frames to be a sequence of intra-coded frames.
18. The method of claim 1 further comprising selecting said digital video file include an image encoded by a wavelet transform.
19. The method of claim 1 wherein said selected frame includes interlaced video data and said method further comprises removing said interlaced data.
20. The method of claim 19 wherein removing said interlaced video data from said frame comprises overwriting a second field of said frame with a first field of said frame.
21. The method of claim 1 further comprising indexing said modified frame to said selected frame thereby enabling transition between a normal mode, in which data representative of said image is obtained from said selected frame, and a trick-mode in which data representative of said image is obtained from said modified frame.
22. A method for processing digital video data for trick-mode display, said method comprising:
 - obtaining, from said digital video data, first data representative of an image;
 - generating, on the basis of said first data, second data for trick-mode display of said image, said second data being modified for delivery at a delivery interval within a specified range of delivery intervals.
23. The method of claim 22 further comprising writing a trick-mode file to a mass-storage subsystem, said trick-mode file including said second data.
24. The method of claim 22 wherein generating said second data comprises adjusting an amount of said first data such that said amount falls within a selected range of amounts, said specified range of amounts being selected on the basis of said specified range of delivery intervals.
25. A method for transitioning between display of digital video data in normal mode and display of digital vide data in trick-mode, said method comprising:

detecting an instruction to transition from normal mode display of digital video data to trick-mode display;

in response to said instruction, serving trick-mode data corresponding to said digital video data.

26. The method of claim 25 further comprising:

detecting an instruction to transition from trick-mode display of said digital video data to normal mode display of said digital video data; and

in response to said instruction, serving normal mode data corresponding to said digital video data.

27. The method of claim 25 wherein serving trick-mode data comprises retrieving said trick-mode data from a trick-mode file.

28. The method of claim 26 wherein serving normal mode data comprises retrieving said normal mode data from a normal mode file.

29. A system for serving digital video data, the system comprising:

a video server for delivery of video content; and

a mass-storage subsystem in communication with the video server, said mass storage subsystem including a first data set for serving said video content in normal mode and a second data set for serving said video content in trick-mode.

30. The system of claim 29 further comprising an index file for correlating said first data set with said second data set, thereby enabling said video server to locate data on said second data set that corresponds to selected data from said first data set.

31. A computer readable medium having encoded thereon software instructions for processing digital video data for trick-mode display, said software comprising instructions for:

obtaining, from said digital video data, first data representative of an image;

generating, on the basis of said first data, second data for trick-mode display of said image, said second data being modified for delivery at a delivery interval within a specified range of delivery intervals.

ABSTRACT

A method for processing digital video data intended for normal mode display to obtain corresponding digital video data for trick-mode display includes modifying the normal mode digital video data to achieve a substantially uniform delivery rate to a video client. This results in smoother trick-mode playback. The modified normal normal mode digital video data is saved as a trick-mode file. When trick-mode playback is requested, a video-server retrieves data from the trick-mode file.

20056257.doc

✓ 10

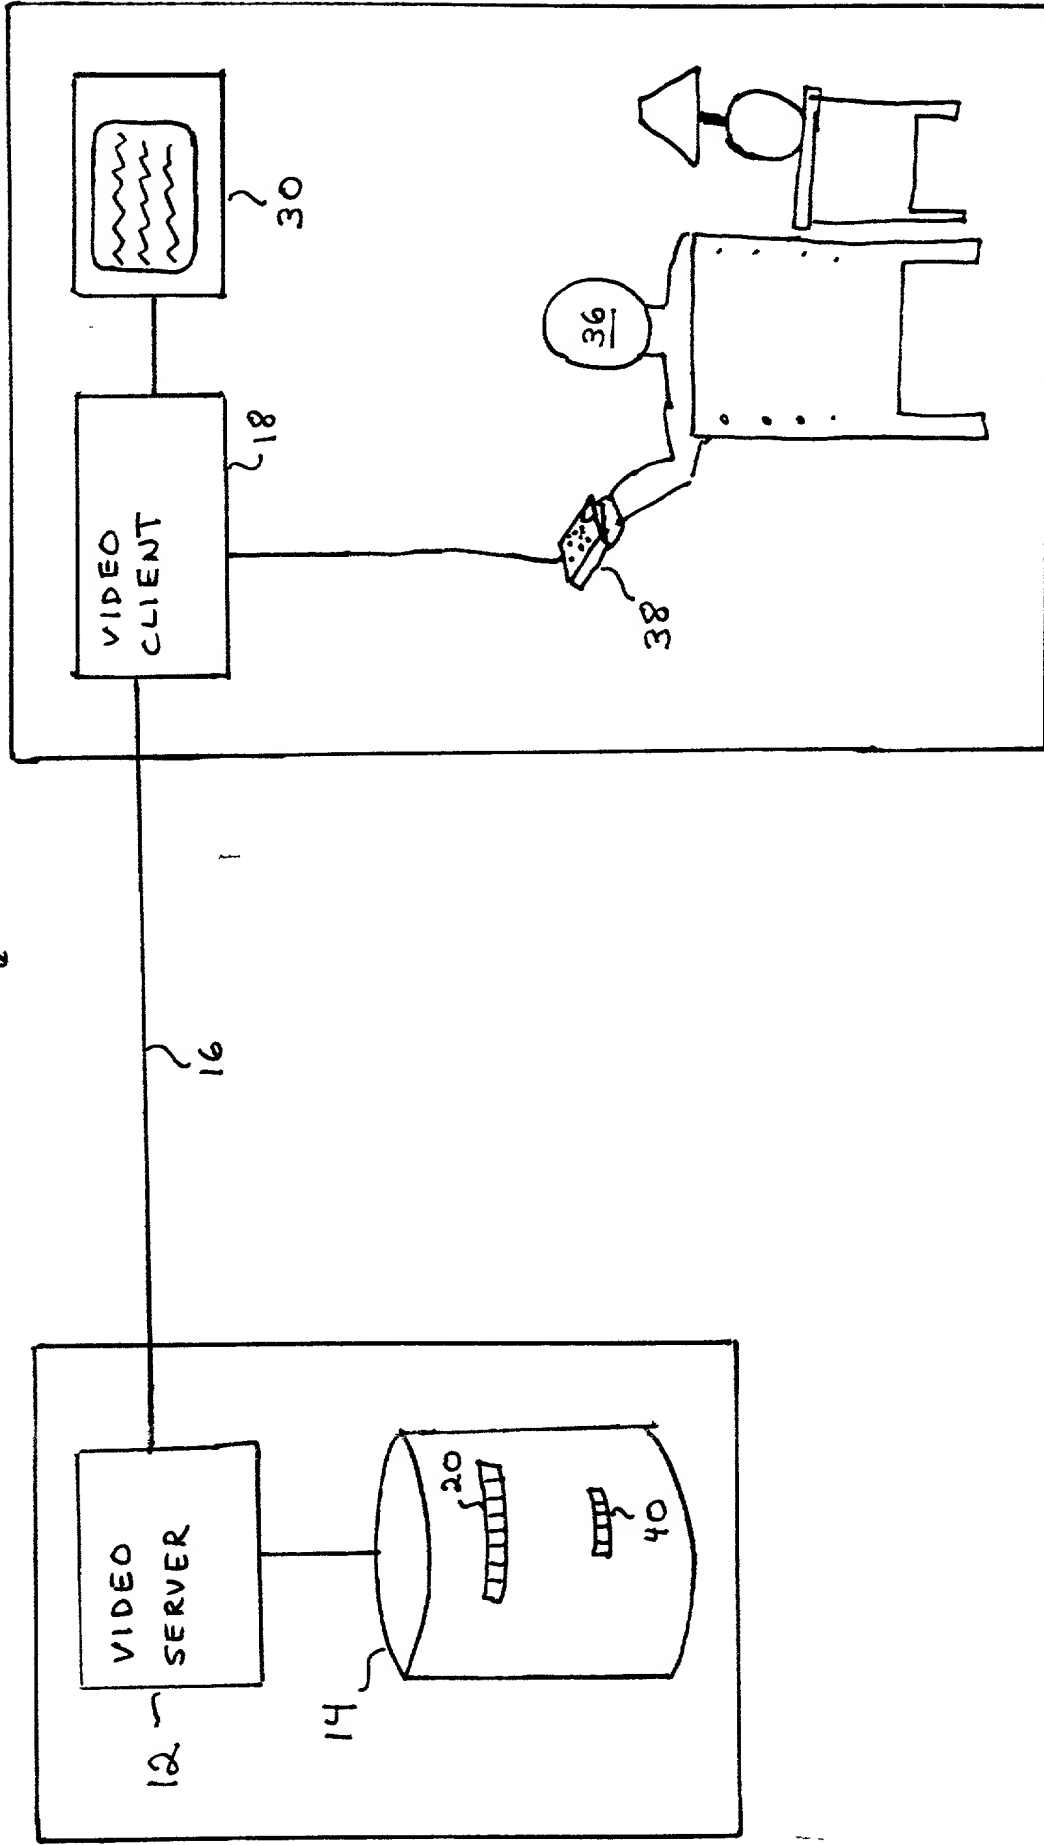


FIG. 1

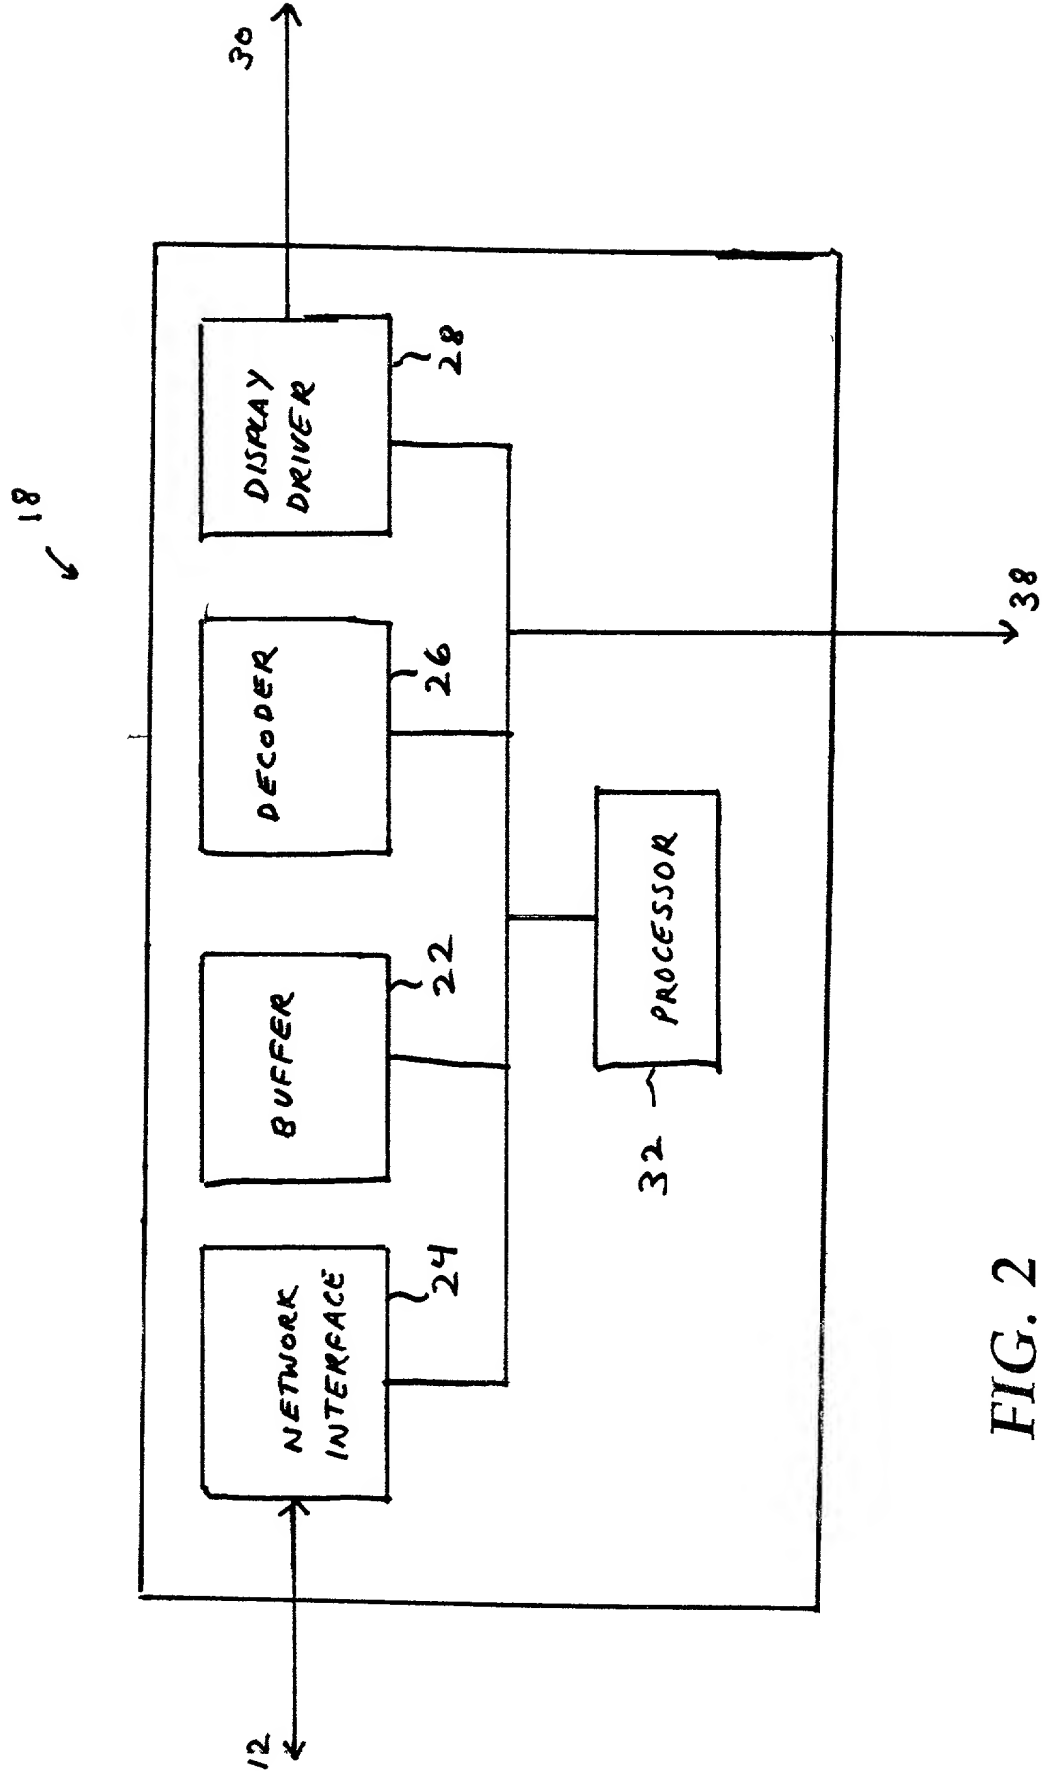


FIG. 2

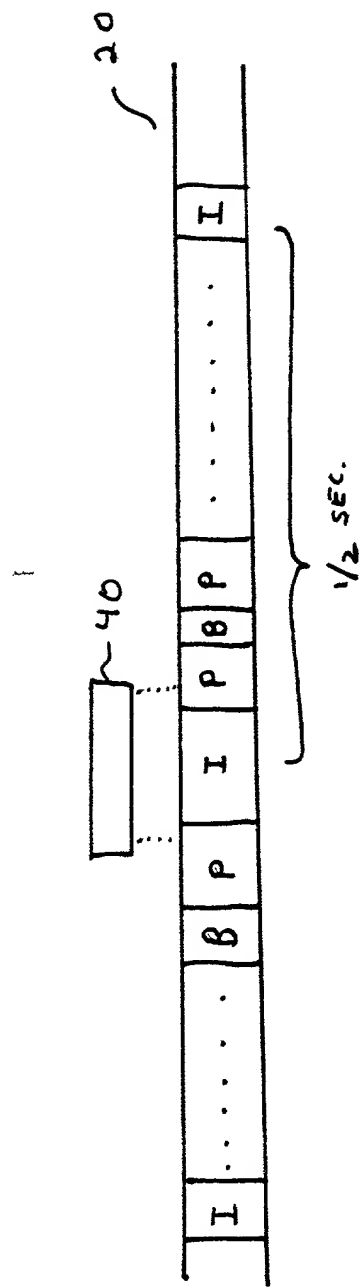


FIG. 3

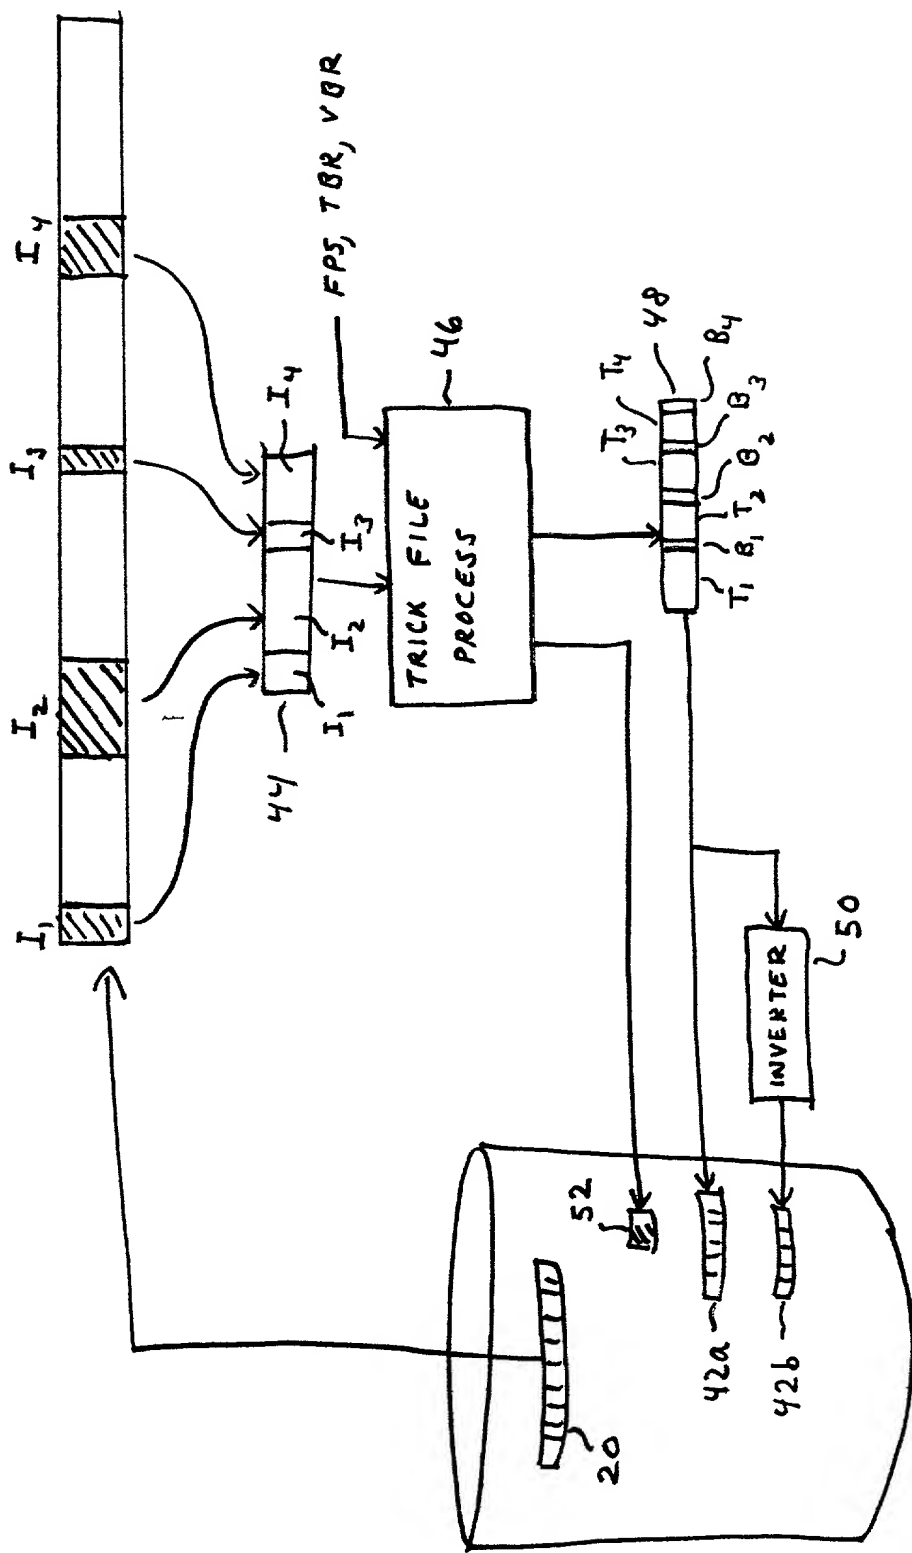


FIG. 4

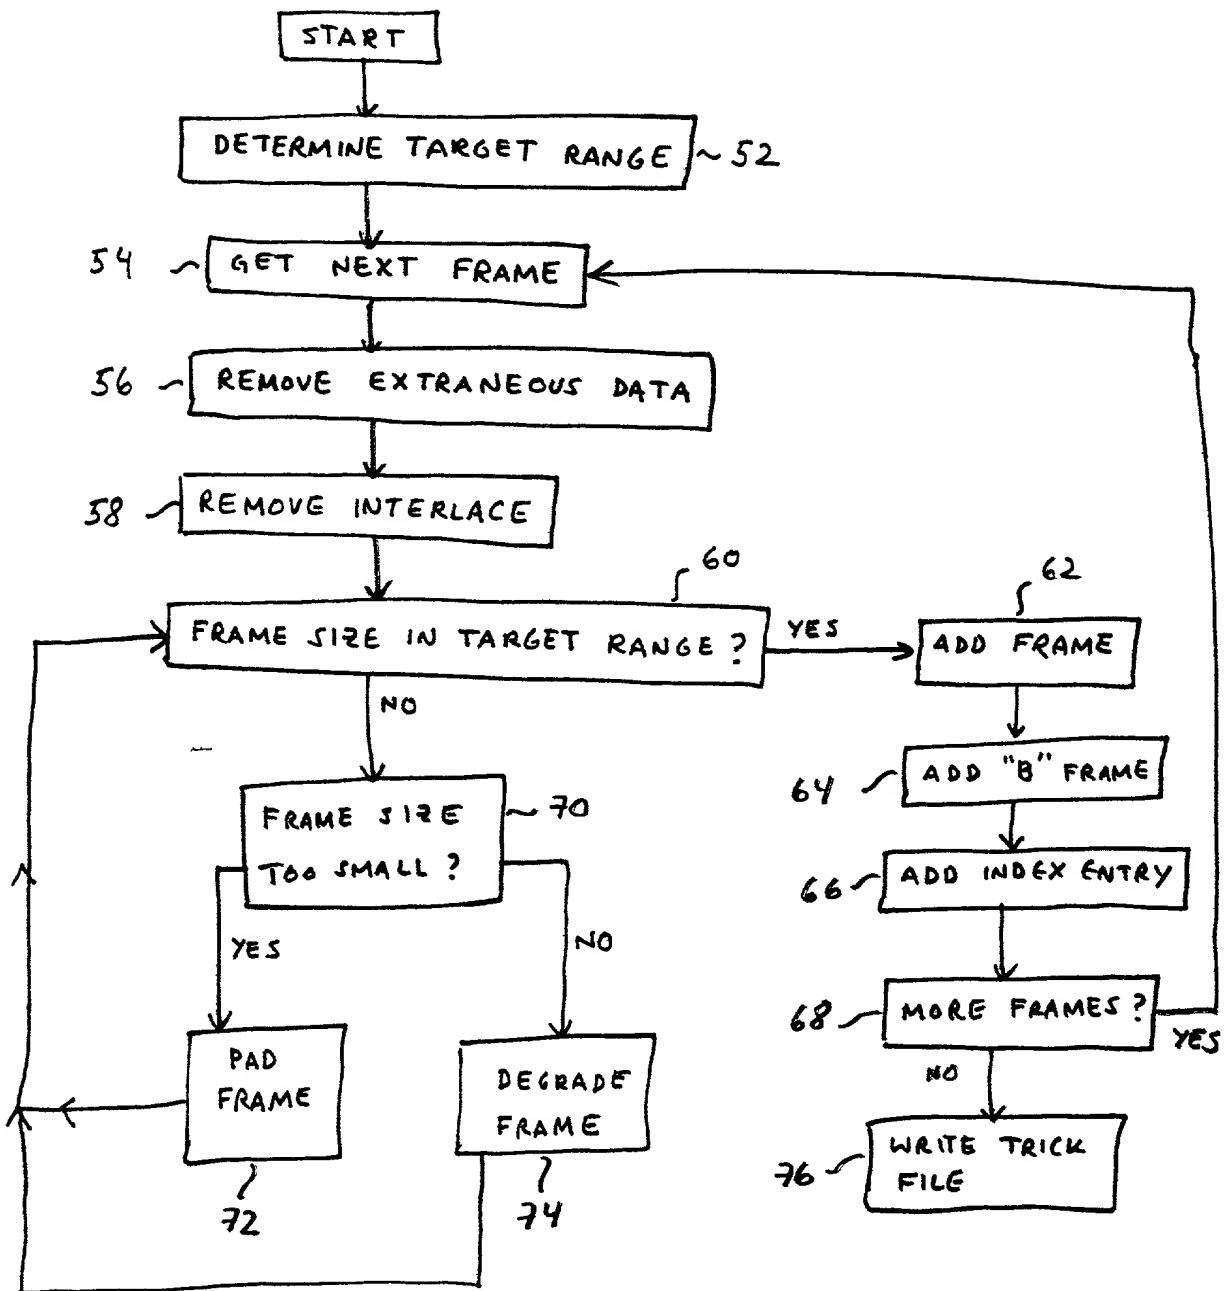


FIG. 5

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled TRICK-MODE PROCESSING FOR DIGITAL VIDEO, the specification of which:

☒ is attached hereto.

☐ was filed on _ as Application Serial No. _ and was amended on _.

☐ was described and claimed in PCT International Application No. _ filed on _
and as amended under PCT Article 19 on _.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Gary A. Walpert, Reg. No. 26,098

Faustino A. Lichauco, Reg. No. 41,942


Address all telephone calls to FAUSTINO A. LICHAUCO at telephone number (617) 489-5209.

Address all correspondence to GARY A. WALPERT at:

FISH & RICHARDSON P.C.
225 Franklin Street
Boston, MA 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: WILLIAM DAVENPORT

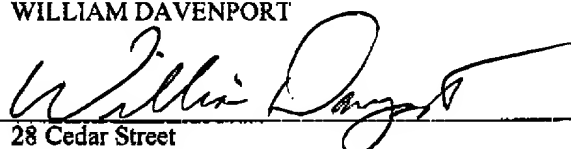Inventor's Signature: 

Date: 10/13/00

Residence Address:

28 Cedar Street
Burlington, MA 01803

Citizenship:

United States

Post Office Address:

28 Cedar Street
Burlington, MA 01803